

TEGUFLEX® W RED



www.perezyperez.es



GENERAL INDUSTRY

EXPANSION JOINTS MOULDED



APPLICATIONS

Hot water up to 90 °C, cooling water, salt solutions, chlorine solutions, esters and ketones.

ADVANTAGES

- ¹ Compensate thermal elongation
- ¹ Isolate vibrations and absorb pressure surges
- ¹ Correct misalignments

TECHNICAL DESCRIPTION

Inner tube: EPDM, black, fluted.

Reinforcement: Nylon cord.

Cover: EPDM, black, smooth, weather and ozone resistant.

Temperature range: -35 °C to 90 °C.

Max 90°C at max WP 10 bar ($\leq$ DN300) / 8 bar ($>$ DN300)

Max 70°C at max WP 16 bar ($\leq$ DN300) / 10 bar ($>$ DN300).

COUPLINGS/FITTINGS

Turnable flanges in zinc plated carbon steel S235JR/S275JR
Other material: stainless steel 316, hot-dip galvanized, EPOXY painting, etc.

EN 1092 PN6/10/16 - ASME B16.5 150lbs. Other types on request.


COMPLEMENTARY INFORMATION

Inner liner PTFE, vacuum ring (316Ti/316L), flameguards, PTFE safety shields on request.

Safe for use in ATEX areas

Type Approvals: DNV-GL

PED (2014/68/EU)

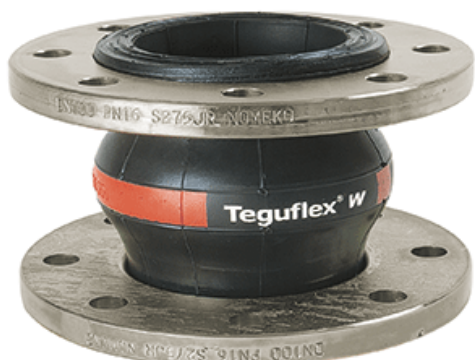

CE 0056 TEGUFLEX W TRELLEBORG

TRELLEBORG IZARRA
IZARRA-ALAVA-SPAIN
Batch number - Working pressure - Testing pressure - T MAX/MIN - DN - Month/Year

**GENERAL INDUSTRY****TEGUFLEX® W RED**

ID mm	PN	WORKING PRESSURE bar	BURSTING PRESSURE bar	BL m	COMPRESSIO N mm	ELONGATION mm	LATERAL mm	ANGULAR °	WITHOUT SUPPORT RING BAR	ARTICLE NUMBER	STOCK (.) or min. order piece
32.0	10/16	16	50	150	30	20	20	35	0.8	TW0032RERE0002	∞
32.0	20	16	50	150	30	20	20	35	0.8	TW0032RERE0003	∞
40.0	10/16	16	50	150	30	20	20	35	0.8	0509233	∞
50.0	10/16	16	50	150	30	20	20	35	0.8	0508319	∞
50.0	20	16	50	150	30	20	20	35	0.8	TW0050RERE0003	∞
65.0	10/16	16	50	150	30	20	20	30	0.8	0509234	∞
65.0	20	16	50	150	30	20	20	30	0.8	TW0065RERE0003	∞
80.0	10/16	16	50	150	30	20	20	30	0.5	0509235	∞
80.0	20	16	50	150	30	20	20	30	0.5	TW0080RERE0003	∞
100.0	10/16	16	50	150	30	20	20	25	0.5	0509236	1
100.0	20	16	50	150	30	20	20	25	0.5	TW0100RERE0003	∞
125.0	10/16	16	50	150	30	20	20	25	0.5	0509237	1
125.0	20	16	50	150	30	20	20	15	0.5	5604036	∞
150.0	10/16	16	50	150	30	20	20	15	0.5	0509238	1
150.0	20	16	50	150	30	20	20	15	0.5	0508024	∞
150.0	6	16	50	150	30	20	20	15	0.5	TW0150RERE0001	∞
200.0	10	16	50	200	30	20	20	15	0.3	0509240	∞
200.0	16	16	50	200	30	20	20	15	0.3	0507968	∞
200.0	20	16	50	200	30	20	20	15	0.3	5012548	∞
250.0	10	16	50	200	30	20	20	10	0.3	0507728	∞
300.0	10	16	50	200	30	20	20	10	0.3	0509241	∞
300.0	16	16	50	200	30	20	20	10	0.3	0509187	∞
300.0	20	16	50	200	30	20	20	10	0.3	TW0300RERE0004	∞
350.0	10	10	30	200	30	20	20	10	0.3	0507727	1
350.0	16	10	30	200	30	20	20	10	0.3	0509156	∞
400.0	16	10	30	200	30	20	20	10	0.3	0380112	∞
450.0	10	10	30	200	30	20	20	10	0.3	0380125	∞
450.0	20	10	50	200	30	20	20	10	0.3	0380167	∞

∞ Upon availability.

www.perezyperez.es**TRELLEBORG**WWW.TRELLEBORG.COM/FLUIDHANDLING

Digital version

